

FIG. 1

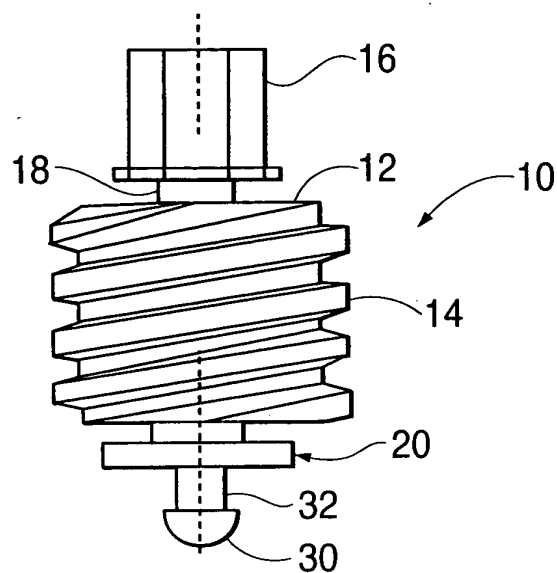
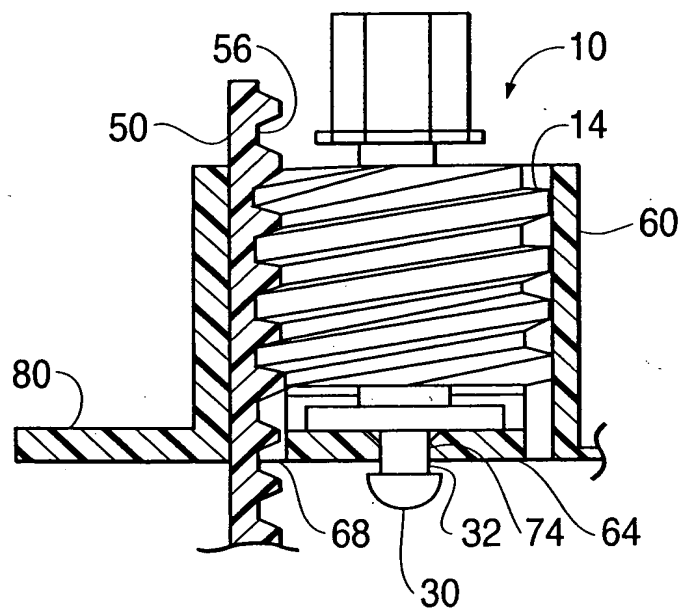


FIG. 5



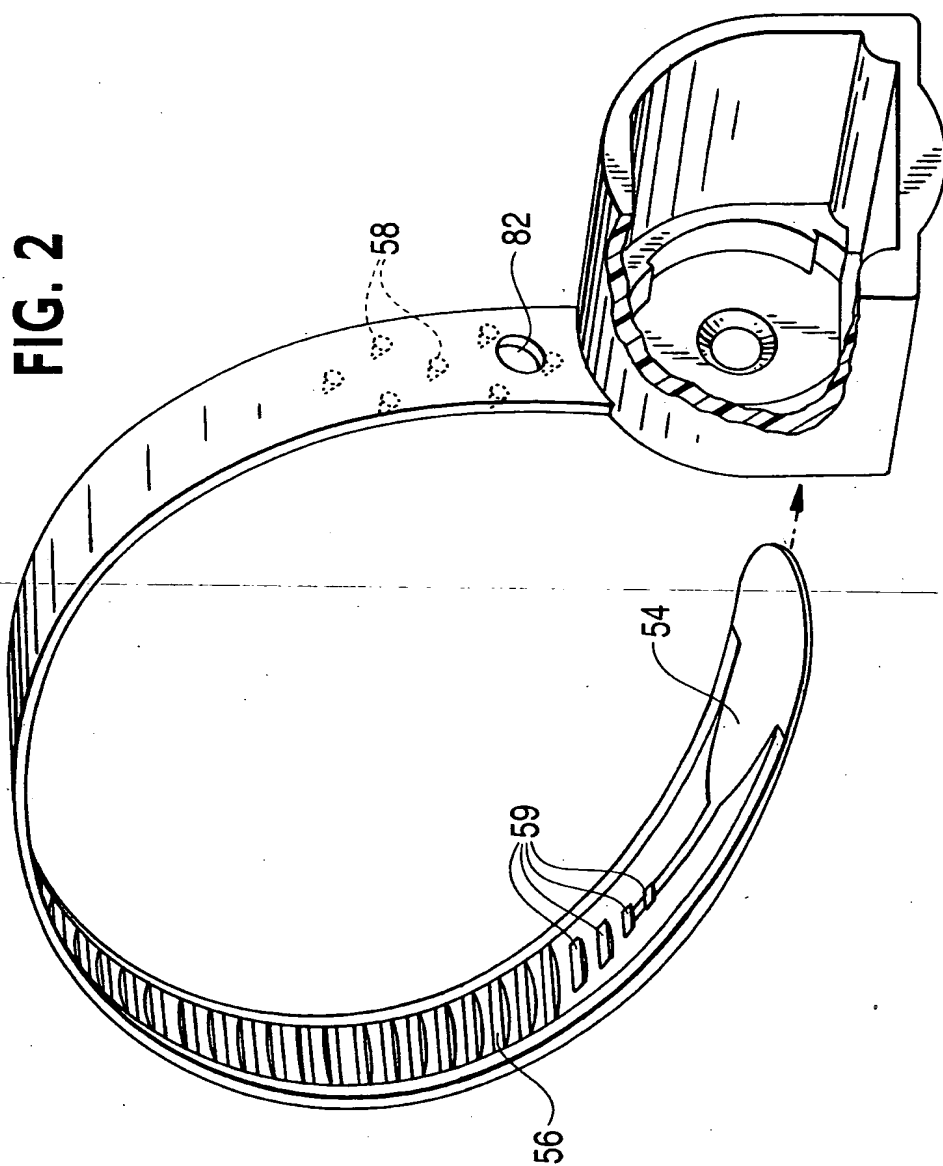


FIG. 2

40



FIG. 4

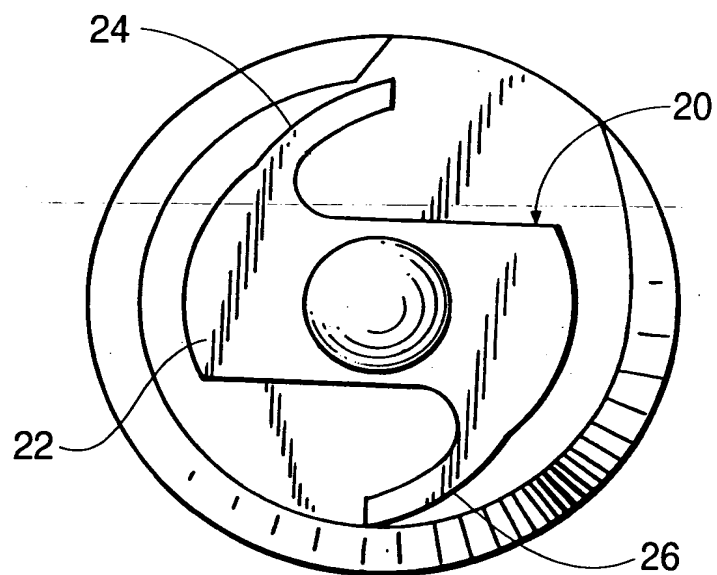


FIG. 6

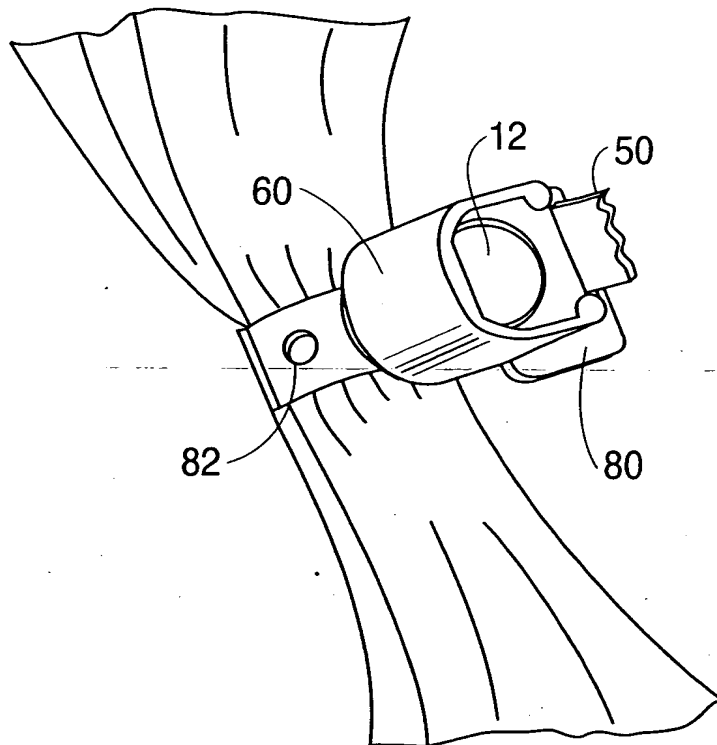


FIG. 6 is a perspective view of the device 10, showing the device 10 in a closed position. The device 10 includes a handle 12, a body 14, and a flared portion 16. The handle 12 is connected to the body 14 by a hinge 18. The body 14 is connected to the flared portion 16 by a hinge 20. The flared portion 16 is shown in a closed position, with the handle 12 and body 14 positioned adjacent to each other. The device 10 is shown in a perspective view, with the handle 12 and body 14 positioned in the foreground and the flared portion 16 positioned in the background.